USING THE PLATFORM QUICK BRACKET

1. Pull the quick bracket pin ”1“ away from the mast.
2. While holding the pin at an outward position, lift the load platform ”2“ and
3. remove from the lift ”3“.
4. Installing the load platform:
5. Align the locker pin of the load platform with the carrier ”4“ on the lift.
6. Push the load platform against the lift ”5“ and lower the lift platform ”6“.
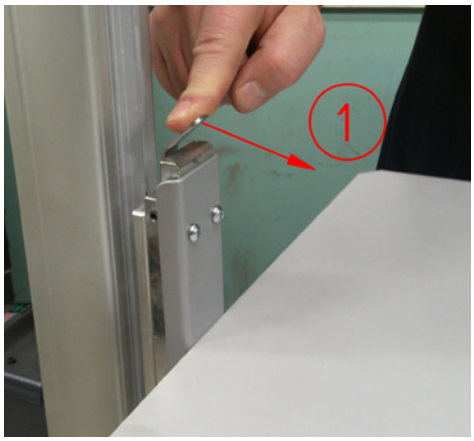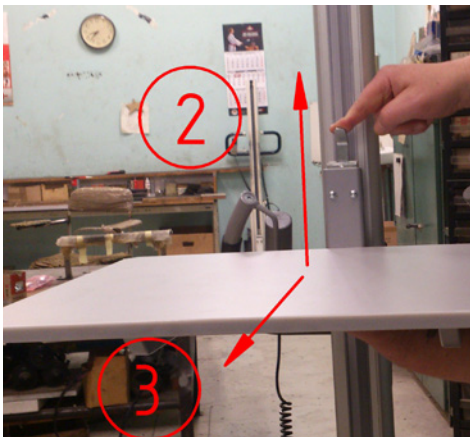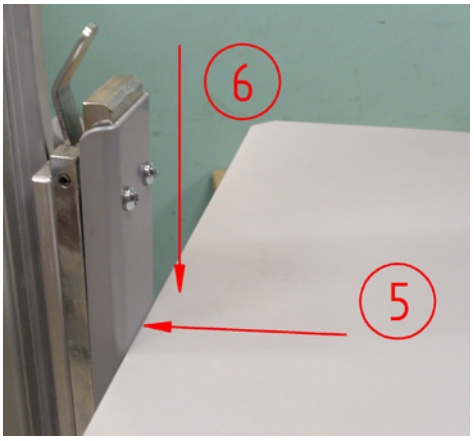
NOTE!
Check the locing! When you lift the load platform, it must not separate from the lift.